

---

## TABLE OF CONTENTS

ES 1. Introduction.....	ES-1
ES 1.1. GSP Revisions .....	ES-2
ES 2. Summary of Plan Area .....	ES-3
ES 2.1. Basin Setting and Hydrogeologic Conceptual Model .....	ES-3
ES 2.2. Water Budget .....	ES-4
ES 3. Sustainable Management Criteria.....	ES-5
ES 3.1. Chronic Lowering of Groundwater Elevations .....	ES-9
ES 3.2. Reduction of Groundwater Storage .....	ES-9
ES 3.3. Subsidence .....	ES-9
ES 3.4. Degraded Water Quality .....	ES-9
ES 3.5. Seawater Intrusion .....	ES-9
ES 3.6. Depletion of Interconnected Surface Waters .....	ES-10
ES 3.7. Monitoring Network.....	ES-10
ES 4. Overview of Projects and Management Actions.....	ES-12
ES 4.1. PMAs Planned for Implementation.....	ES-12
ES 4.1.1. Multi-Benefit Groundwater Recharge Programs .....	ES-12
ES 4.1.2. Grower Education and Outreach .....	ES-12
ES 4.1.3. Deer Creek Instream Flow Enhancements and Conjunctive Use Management Projects.....	ES-12
ES 4.1.4. Lower Deer Creek Improvements and Habitat Restoration Phases 1 and 3.....	ES-13
ES 4.1.5. Demand Management .....	ES-13
ES 4.1.6. Well Mitigation Program .....	ES-13
ES 4.2. Proposed Potential PMAs.....	ES-13
ES 4.2.1 Direct Groundwater Recharge .....	ES-13
ES 4.2.2. Invasive Plant Removal.....	ES-13
ES 4.2.3. Surface Water Supply Augmentation & In-Lieu Groundwater Recharge.....	ES-13
ES 4.2.4. Education/Outreach, In-Lieu Groundwater Recharge .....	ES-14
ES 4.2.5. In-Lieu Groundwater Recharge .....	ES-14
ES 4.2.6. Monitoring to Fill Data Gaps & Programs to Support Wells .....	ES-14
ES 5. PLAN IMPLEMENTATION .....	ES-14
ES 6. Overview of Governance.....	ES-17

## LIST OF TABLES

Table ES-1. Summary of Undesirable Results Applicable to the Plan Area .....	ES-6
Table ES-2. Summary of MT, MO, and Undesirable Results .....	ES-7
Table ES-3. Estimated GSP Implementation Costs through 2042 .....	ES-15
Figure ES-3. GSP Implementation Schedule .....	ES-17

## LIST OF FIGURES

Figure ES-1. Los Molinos Subbasin Location Map .....	ES-2
Figure ES-2. Map of all Sustainability Indicator Wells .....	ES-11

## ES 1. INTRODUCTION

In 2014, the California legislature enacted three bills, AB 1739 (Dickinson), SB 1168 (Pavley), and SB 1319 (Pavley), collectively known as the Sustainable Groundwater Management Act (SGMA) in response to overdraft conditions of California's groundwater resources. Since 2016, the Tehama County Flood Control and Water Conservation District (Tehama County FCWCD) (District), a local and regional authority, is the exclusive GSA for the Los Molinos Subbasin. The Tehama County Groundwater Commission serves as an advisory commission to the Tehama County Flood Control and Water Conservation District Board of Directors for GSA related matters. Groundwater Commission meetings, which are open to the public, were held the 4<sup>th</sup> Wednesday of each month, except holidays.

The GSP provides information demonstrating that the past and present actions of the GSA have created a sustainably managed groundwater basin. The GSP outlines planned management oversight and activities that will result in continued sustainability of the groundwater resources in the Los Molinos Subbasin.


This Executive Summary and the companion GSP are organized as follows:

- Executive Summary
- Section 1 Introduction
- Section 2 Plan Area, Basin Setting and Water Budgets
- Section 3 Sustainable Management Criteria and Monitoring Network
- Section 4 Projects and Management Actions
- Section 5 Plan Implementation
- Appendices

The following sections provide factors about the Subbasin and an overview of technical content in the GSP.

The Los Molinos Subbasin (Subbasin) (DWR Subbasin No. 5-021.54) (**Figure ES-1**) has been identified by the California Department of Water Resources (DWR) as a high priority subbasin. Under SGMA high priority subbasins are required to prepare and be managed under a GSP by January 31, 2022. This GSP, prepared by the GSA, adequately defines groundwater conditions in the managed area and establishes

criteria to maintain and/or achieve sustainability within 20 years of the GSP adoption.

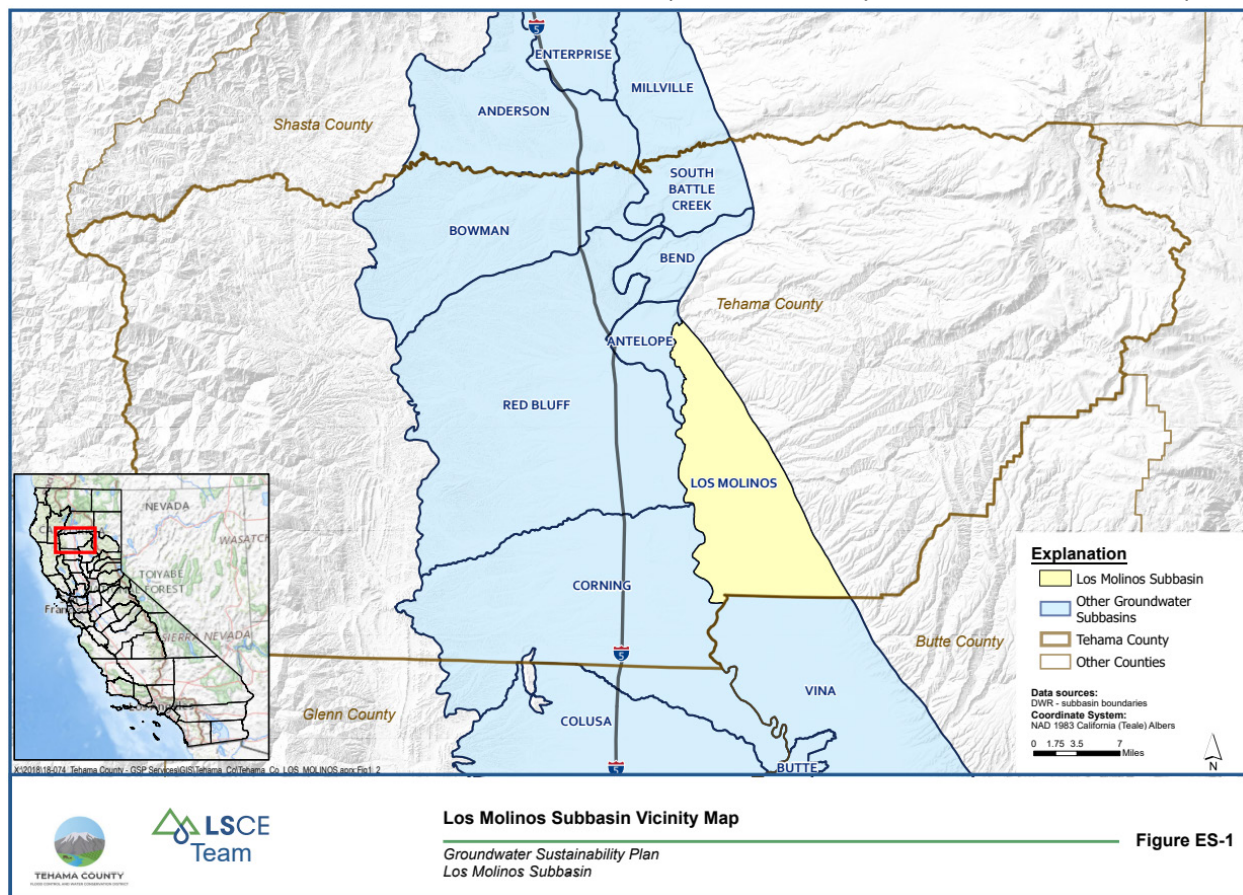

**Figure ES-1. Los Molinos Subbasin Location Map**

A Public Draft GSP was made available for public review and comment on September 24, 2021, for a period of 45 days. The GSA will receive comments, review, and prepare responses to comments, and revised the Draft GSP. The Final GSP will include those revisions. Comment letters and responses will be included as GSP appendices.

### ES 1.1. GSP REVISIONS

In 2024, the GSA revised the GSP to resolve deficiencies identified by DWR in October 2023.

On October 26, 2023, the GSA received a letter from DWR documenting the incomplete determination of the GSP submitted for the Subbasin in January 2022. The letter described deficiencies identified by DWR and indicated that the GSA would have the opportunity to perform corrective actions to address the noted deficiencies within a 180-day period concluding on April 23, 2024.

In 2024, the GSA revised the GSP through a collaborative process to address the identified deficiencies. Following coordination meetings and public outreach, significant revisions to the GSP have been made including:

- Revisions to the description of undesirable results;

- Revisions to the Minimum Thresholds (MTs) for Chronic Lowering of Groundwater Levels;
- Revisions and additions to Projects and Management Actions, to include revised and expanded recharge projects, a demand reduction plan, and a well mitigation program.

These changes are reflected in the relevant sections of this new revised version of the GSP.

## ES 2. SUMMARY OF PLAN AREA

The Los Molinos Subbasin (DWR Subbasin No. 5-021.56) covers 19,100 acres and is in the Northern Sacramento Valley Groundwater Basin (**Figure ES-1**). Los Molinos is one of seven (7) subbasins within Tehama County. The Tehama County FCWCD is the exclusive GSA for six (6) of those subbasins: Antelope, Bend, Bowman, Los Molinos, Red Bluff, and South Battle Creek. The seventh, the Corning Subbasin, extends into Glenn County, and the GSP for that subbasin is being developed in a coordinated effort between the Tehama County FCWCD and Corning Sub-basin GSA.

The lateral extent of the Subbasin is consistent with Bulletin 118 (DWR, 2018). It is bounded on the north by the Bend Subbasin and Red Bluff Subbasin, on the east and south by the Los Molinos, and on the south and west by the Red Bluff Subbasin. The Sacramento River runs along the western extent of the Subbasin, and Antelope Creek borders the majority of the eastern Subbasin. The Subbasin extends south to the point where Antelope Creek terminates into the Sacramento River. The vertical boundaries of the Subbasin are the land surface (upper boundary) and the definable bottom of the basin (lower boundary). The definable bottom is the base of fresh water located at approximately 800-2,000 feet below ground surface (bgs).

Lands in the Los Molinos Subbasin are mostly privately owned with state and federal agencies owning a small portion. Private lands are majority farmland with nearly equal amounts riparian and other native vegetations. Over 1,500 groundwater wells exist in the Subbasin, and most are domestic wells. A few wells are operated for the public water supply and roughly ten times that number of wells are maintained for agricultural production. Numerous monitoring programs are operated in the Subbasin by federal, state, and local public agencies including the EPA, USGS and DWR. Monitoring programs collect data on groundwater levels, groundwater quality, land subsidence and surface water conditions. Data from these programs were incorporated (as applicable) into the evaluation of basin conditions within this GSP and were part of previous management plans including the Tehama County AB3030 Groundwater Management Plan (GWMP) and the Northern Sacramento Valley Integrated Regional Water Management Plan (IRWMP). Components of these management plans were incorporated into this GSP.

### ES 2.1. Basin Setting and Hydrogeologic Conceptual Model

The ground surface generally slopes from the east to west with steeper slopes in the east of the subbasin and water generally follows the topography flowing in a west to southwestern direction. Aquifer recharge contributions to the deeper geologic formations occurs on the eastern side of the subbasin where the formations outcrop at the surface, however recharge of the Subbasin primarily occurs from the flow of the Sacramento River and perennial streams. Water flows downward in the upper aquifer driven by natural recharge. Gaining conditions along streams represent discharge from the aquifer and occur seasonally. Larger sources of discharge from the aquifer are likely from production of wells even though a portion of the water returns to the aquifer via recharge from irrigations. Even with the noted groundwater withdraw there is little to no reported evidence of subsidence within the Subbasin.

A horizontal groundwater gradient magnitude are approximately 20 ft/mile and 10 ft/mile for the upper and lower aquifers, respectively. Seasonal historic high-water levels during wet periods were between about 10 and 90 ft bgs in the Upper Aquifer, and from less than 1 ft to about 150 ft bgs in the Lower Aquifer. Groundwater quality is generally good with few exceptions most notably undesirable concentrations of arsenic in some areas of the Subbasin.

The Subbasin is defined as a two-aquifer system with unconfined to semi-confined conditions in the Upper Aquifer and semi-confined to confined conditions in the Lower Aquifer. Fresh water occurs as groundwater to a maximum depth of over -2,000 ft msl in the west of the Subbasin. The major water bearing formations within the Subbasin are the Tuscan and Tehama Formations with some contribution from the shallower Quaternary sedimentary deposits. More recent geologic history is dominated by fluvial and alluvial deposition.

## **ES 2.2. Water Budget**

In accordance with technical guidance documents provided by DWR, water budget scenarios were evaluated using a groundwater flow model that quantified historical, current, and projected groundwater budget conditions. The water budgets were developed through application of the Tehama Integrated Hydrologic Model (Tehama IHM), a numerical groundwater flow model that characterizes surface water and groundwater movement and storage across the entire Subbasin and extending outside of the Subbasin. The Tehama IHM is an integrated groundwater and surface water model developed for the purpose of conducting sustainability analyses within Tehama County. The model used foundational elements of DWR's SVSim regional model for the Sacramento Valley (DWR, 2021) and was refined locally for improved application in the Subbasin area. Use of publicly available modeling platforms is a guiding principle under DWR Best Management Practices and facilitates independent assessment of modeling results.

The model was calibrated using records from 1990-2019 (29 years). This period represents long-term average hydrologic conditions and is considered the historical water budget period. The current water budget presents information on the effects of recent hydrologic and water demand conditions on the groundwater system and spans five different recent periods. The historical and current water budget periods were selected to evaluate conditions over discrete representative periods considering the following criteria: Sacramento Valley water year type; long-term mean annual water supply; inclusion of both wet and dry periods, antecedent dry conditions, adequate data availability; and inclusion of current hydrologic, cultural, and water management conditions in the Subbasin. Water budgets were calculated for a projected 50-year period. The 50-year projected water budget uses hydrologic conditions representative of the most recent 50 years of hydrology in the Subbasin, with adjustments applied in scenarios for evaluating the water budget under climate change and altered water supply and demand conditions.

Model results indicate that over the historical period the largest outflow from the groundwater system (GWS) comes from groundwater pumping (on average 16 thousand-acre feet (taf) per year). Groundwater discharge to the surface is 2 taf per year. Deep percolation is the largest net inflow to the GWS (54 taf per year). Net subsurface flows to adjacent subbasins represents 56 taf per year loss to the GWS. Groundwater root uptake represents a flux of 17 taf per year leaving the GWS. Over the 29-year historic period the average annual change in storage was around -74 af per year.

The recent three-year period from 2016 through 2018 is believed to provide a reasonable representation of the recent water budget conditions based on an evaluation of past water budgets and the hydrologic conditions over these recent periods. A comparison of several future modeled water budgets was made to define the possible effect of different climate change and management action scenarios. Overall projected storage change in the Subbasin is small and differs little between the different climate change conditions.

The sustainable yield is estimated to be 28,000 acre-feet per year, which is equal to the volume of groundwater extracted annually in the Subbasin (by pumping and by uptake) minus the simulated annual decrease in storage under the projected model scenario with future land use and 2070 climate change conditions. Under these conditions groundwater extractions range from 22,000 to 25,000 acre-feet per year. Under all of the projected scenarios, the change in storage is simulated to be very small or practically zero. Assuming potential uncertainty of 25 percent associated with the water budget estimates, an associated range of values for the estimated sustainable yield would be 21,000 to 35,000 acre-feet per year.

### **ES 3. SUSTAINABLE MANAGEMENT CRITERIA**

Sustainable management criteria include establishing a sustainability goal for the Subbasin, defining undesirable results, and quantifying minimum thresholds and measurable objectives.

The sustainability goal for the Los Molinos Subbasin GSP is to manage the groundwater Subbasin to:

- Protect and maintain safe and reliable sources of groundwater for all beneficial uses and users.
- Ensure current and future groundwater demands account for changing groundwater conditions due to climate change.
- Establish and protect sustainable yield for the Subbasin by achieving measurable objectives set forth in this GSP in accordance with implementation and planning periods.
- Avoid undesirable results defined in the GSP in accordance with SGMA.

Undesirable results occur when significant and unreasonable effects for any of the six sustainability indicators defined by SGMA are caused by groundwater conditions occurring in the Subbasin. The GSA defines the negative effects to beneficial uses and users that would be experienced at undesirable result conditions as 10 wells becoming dry (after the GSP revision) within each Tessellation Hexagon or when water levels at any RMP in the future decline 7.5 ft or more over a five (5) year period. The GSA will address the adverse impacts, if any through projects to supplement supplies of water and through a well mitigation program. The impacts to groundwater-dependent ecosystems that may occur without rising to significant and unreasonable levels constituting undesirable results has yet to be determined. The GSA is actively addressing data gaps and monitoring to establish the relationship between interconnected surface water and groundwater and the potential adverse effects of a depletion of groundwater. The GSA will update the Undesirable Results definition to include depletion of interconnected surface water in the 5-year Periodic Evaluation in January 2027.

Sustainable management criteria (SMC) also define the conditions that constitute sustainable groundwater management. Note that undesirable results have not occurred historically in the Los Molinos Subbasin and are not projected to occur in the future. The sustainable management criteria will commit the GSA to meeting the sustainability goal for the Subbasin.

Sustainability indicators are measurable indicators that are used to set Measurable Objectives (MO), interim milestones and Minimal Thresholds (MT) to ensure that the sustainability goals are met. Undesirable results occur when significant and unreasonable effects are caused by groundwater conditions for a given sustainability indicator. Sustainability indicators are listed in **Table ES-1** along with whether undesirable results occurred in the subbasin and if they are likely to occur in the future without GSP implementation. Sustainability indicators will be measured at representative monitoring sites (RMS) selected based on location, aquifer, and historical data. MOs, MTs and undesirable results are defined in **Table ES-2**.

**Table ES-1. Summary of Undesirable Results Applicable to the Plan Area**

SUSTAINABILITY INDICATOR	HISTORICAL PERIOD	EXISTING CONDITION	FUTURE CONDITIONS WITHOUT GSP IMPLEMENTATION
Chronic Lowering of Groundwater Elevations	No	No	No
Reduction of Groundwater Storage	No	No	No
Seawater Intrusion	Not Applicable	Not Applicable	Not Applicable
Degraded Water Quality	Limited	Limited	Limited
Land Subsidence	No	No	No
Depletion of Interconnected Surface Water	Data Gap	Data Gap	TBD



**Table ES-2. Summary of MT, MO, and Undesirable Results**

SUSTAINABILITY INDICATOR	MINIMUM THRESHOLD	MEASURABLE OBJECTIVE	UNDESIRABLE RESULT
Chronic Lowering of Groundwater Elevations	2020-2022 lows minus 20 feet	<b>Upper &amp; Lower Aquifer:</b> Spring 2015 groundwater elevation minus five feet (for wells with increasing or no groundwater trends) or projected Spring 2042 groundwater elevation minus five feet for wells with declining groundwater elevations	10 supply wells become dry (after the GSP revision) within a tessellation hexagon, or when water levels at any RMP in the future decline 7.5 ft or more over a five (5) year period.
Reduction of Groundwater Storage	<b>Upper &amp; Lower Aquifer:</b> Amount of groundwater in storage when groundwater elevations are at their minimum threshold	<b>Upper &amp; Lower Aquifer:</b> Amount of groundwater storage when groundwater elevations are at their measurable objective	25% of groundwater elevations measured at same RMS wells exceed the associated MT for two consecutive fall measurements.
Land Subsidence	Two feet over 20 years (i.e., no more than 0.5 feet of cumulative subsidence over a five-year period (beyond the measurement error), solely due to lowering of groundwater elevations	One foot over 20 years (Zero inelastic subsidence, in addition to any measurement error). If InSAR data are used, the measurement error is 0.1 feet and any measurement 0.1 feet or less would not be considered inelastic subsidence	50% of RMS exceed the minimum threshold over a 5-year period that is irreversible and is caused by lowering of groundwater elevations
Seawater Intrusion	Not Applicable	Not Applicable	Not Applicable

SUSTAINABILITY INDICATOR	MINIMUM THRESHOLD	MEASURABLE OBJECTIVE	UNDESIRABLE RESULT
Degraded Water Quality	<p><b>Upper &amp; Lower Aquifer:</b>                      TDS concentration of 750 mg/L at all RMS wells</p>	<p><b>Upper &amp; Lower Aquifer:</b>                      California lower limit secondary MCL concentration for TDS of 500 mg/L measured at RMS wells</p>	<p>At least 25% of RMS exceed the minimum threshold for water quality for two consecutive years at each well where it can be established that GSP implementation is the cause of the exceedance</p>
Depletion of Interconnected Surface Water	<p>Same as chronic lowering of groundwater levels (Initial)</p>	<p>Same as chronic lowering of groundwater levels (Initial)</p>	<p>25% of groundwater elevations measured at RMS wells exceed the associated MTs for 2 consecutive fall measurements.</p>

### **ES 3.1. Chronic Lowering of Groundwater Elevations**

The Revised GSP updated the MTs for RMS, however MOs are maintained as are IMs. MTs for chronic lowering of groundwater levels were developed and updated in 2023-2024 through the GSP revision process. The MOs for Chronic Lowering of Groundwater Elevations indicator is defined at each of the RMS (wells) as that well's spring 2015 groundwater elevation minus five feet or projected 2042 groundwater elevation minus five ft for wells with declining groundwater elevations. The MTs are set to the 2020-2022 low water levels with a 20 foot operational margin below those levels, meaning, 2020-2022 lows -20 ft. . Undesirable Results for Chronic Lower of Groundwater Elevations occur if 1) 10 supply wells become dry (after the GSP revision) within a tessellation hexagon, or 2) when water levels at any RMP in the future decline 7.5 ft or more over a five (5) year period. Well impact analysis was conducted and includes wells from all dates and of all types. This dataset likely is incomplete and not completely accurate, however the projected basin-wide number of wells that could go dry if all RMS water levels are at their MTs is 288 of the 1455 wells or 20%. The well impact analysis and a map of predicted impacted wells at MTs are included in Chapter 3.

### **ES 3.2. Reduction of Groundwater Storage**

The groundwater storage reduction sustainability indicator will be evaluated using groundwater levels as a proxy in conjunction with annual evaluations of monitored groundwater level changes. Based on considerations applied in developing the groundwater level minimum thresholds, reduction in groundwater storage minimum thresholds do not exceed any identified significant and unreasonable level of depleted groundwater storage volume.

### **ES 3.3. Subsidence**

Land subsidence is not known to have occurred in the subbasin, is not occurring presently, and is not expected to occur without GSP implementation. MOs have been defined as a decline of one foot over 20 years. Subsidence is based on InSAR data. InSAR measurement error is 0.1 feet and any measurement 0.1 feet or less would not be considered inelastic subsidence. MTs are defined by a decline of two feet over 20 years. Undesirable Results are defined as 50% of RMS exceeding the minimum threshold over a 5-year period that is irreversible and is caused by lowering of groundwater elevations. RMS for subsidence are the InSAR pixels collocated or near the water level RMS wells.

### **ES 3.4. Degraded Water Quality**

Groundwater quality in the Subbasin is generally good with a few exceptions. Present conditions are unchanged from conditions within the historical period however conditions could worsen without GSP implementation. MOs are defined by the California MCL for TDS of 500 mg/L measured at RMS wells. MTs are set at 750 mg/L measured at RMS wells. Undesirable Results occur if 25% of RMS exceed the minimum threshold for water quality for two consecutive years at an individual well where it can be established that GSP implementation is the cause of the exceedance.

### **ES 3.5. Seawater Intrusion**

Due to the location of the Subbasin relative to any potential source of seawater this sustainability criterium is not applicable to this subbasin.


### ES 3.6. Depletion of Interconnected Surface Waters

The interconnected surface water sustainability indicator could not be properly defined due to gaps in historical surface and groundwater monitoring programs. It is not known if conditions will worsen without GSP implementation without a reliable way to correlate the groundwater and surface water elevations. Due to the lack of data associated with this sustainability indicator the MOs and MTs are considered interim and will use the Chronic Lowering of Groundwater Elevations sustainability indicator as a proxy. An Undesirable Result is defined as 25% of groundwater elevations measured at upper aquifer RMS wells dropping below the associated threshold during two consecutive fall measurements.

### ES 3.7. Monitoring Network

Monitoring networks are developed to quantify current and future groundwater conditions in the Los Molinos Subbasin, as well as within individual GSA jurisdictions. The monitoring network for sustainability indicators is summarized in **Figure ES-2**. There are a total of seven RMS wells in the Los Molinos Subbasin, five in the Upper Aquifer and two in the Lower Aquifer. A proposed TSS well would bring the total RMS to eight. The five Upper Aquifer RMS wells serves as the monitoring locations for the Chronic Lowering of Groundwater Elevations, Reduction of Groundwater Storage, Depletion of Interconnected Surface Water, and Water Quality indicators. The Lower Aquifer RMS wells are associated with the first three indicators, but not the Interconnected Surface Water Depletion indicator. The proposed TSS well would be double completion and would monitor both upper and lower aquifers. The InSAR RMS are pixels collocated or near the water level RMS wells. Measured water level elevations will inform MO and MTs for Chronic Lowering of Groundwater Elevations, Reduction of Groundwater Storage, Depletion of Interconnected Surface Water indicators. Water quality samples taken from RMS wells will inform the MOs and MTs for the Degraded Water Quality indicator. Land Subsidence will be informed at RMS (select pixels) using satellite InSAR data. The monitoring network will be periodically reviewed and modified as needed; for instance, additional RMS wells may be added to better understand interconnected surface waters.

A Data Management System (DMS) was developed to store and analyze data collected as part of this GSP. With submittal and implementation of the Los Molinos Subbasin GSP, there will be a publicly accessible weblink to view reports, maps, graphs, and current data under the Subbasin monitoring plan.

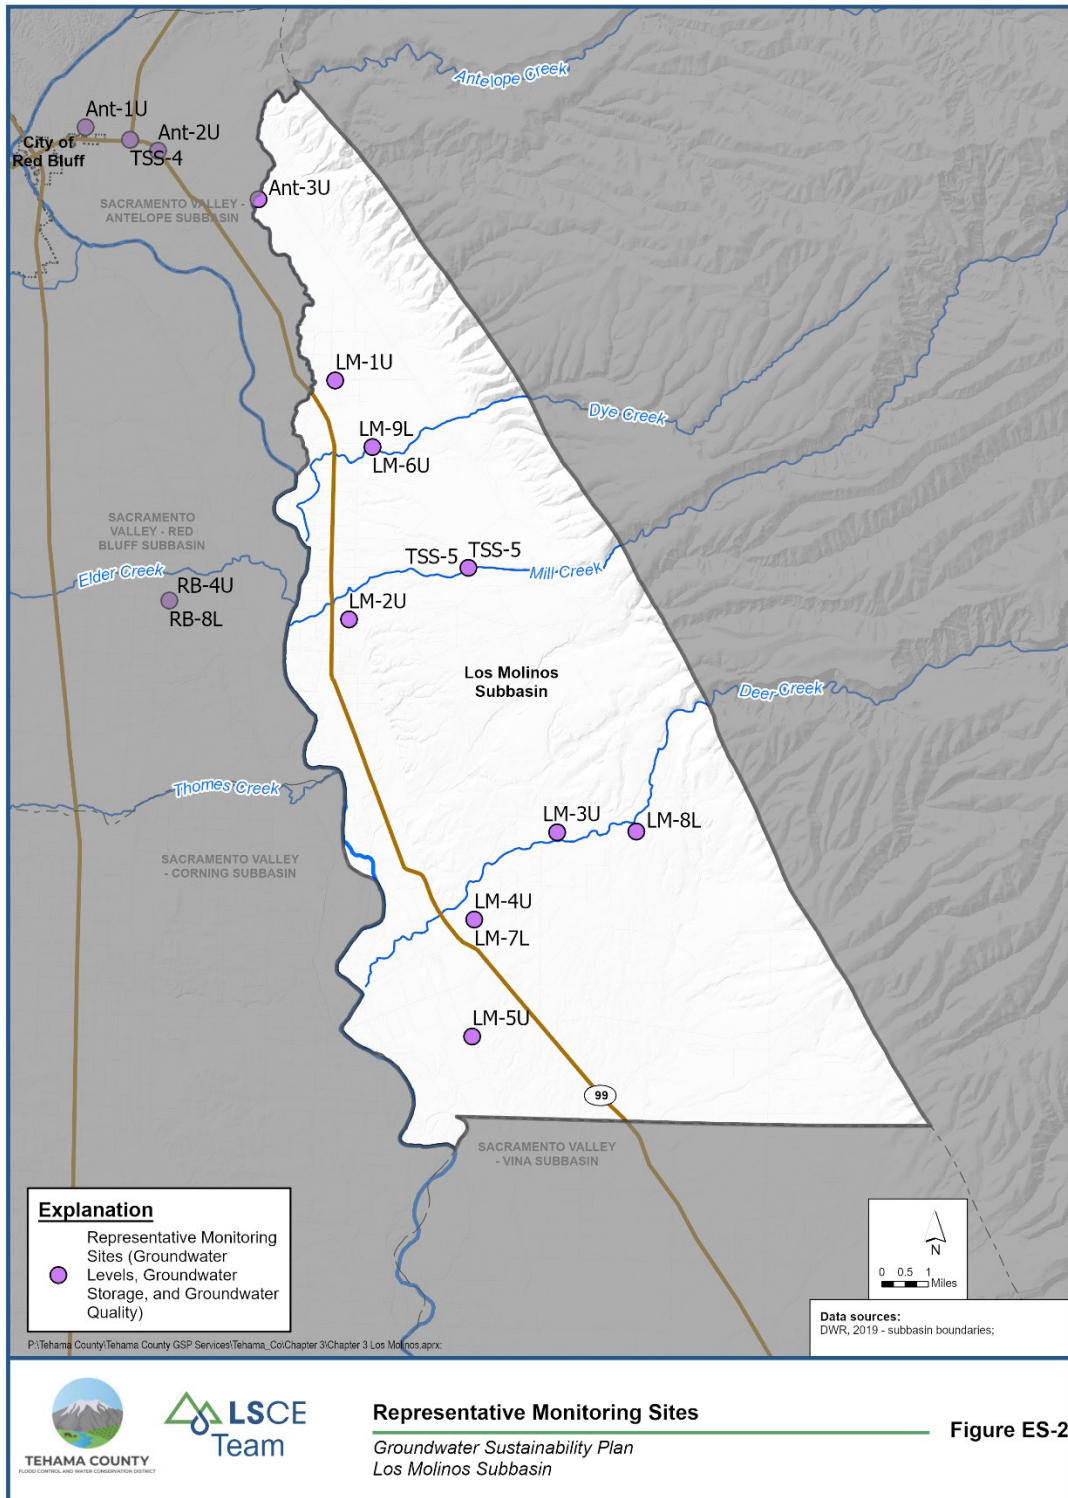

**Figure ES-2. Map of all Sustainability Indicator Wells**

## **ES 4. OVERVIEW OF PROJECTS AND MANAGEMENT ACTIONS**

In accordance with 23 CCR §354.44, Projects and Management Actions (PMAs) were developed to achieve and maintain the Subbasin sustainability goal by 2042 and avoid undesirable results over the GSP planning and implementation horizon. Projects generally refer to structural features whereas management actions are typically non-structural programs or policies designed to support sustainable groundwater management. Because the Los Molinos Subbasin is currently and projected to be sustainable (i.e., no onset of undesirable results), PMAs are not expected to be essential for sustainability. However, future conditions are uncertain and PMAs will be employed through the principle of adaptive management on an as-needed basis.

Even so, the GSA plans to continue monitoring sustainability indicators throughout GSP implementation and will initiate and scale PMAs as needed to ensure that the measurable objectives are met. The following describes PMAs identified for the Los Molinos Subbasin.

The Revised GSP in Chapter 4 describes a Well Mitigation Program and a Demand Management Program, to address potential adverse effects to beneficial uses and users and to curtail or limit groundwater use, respectively. The GSA has signed resolutions for both these programs, which are contained in Appendices 4-B for Demand Management and 4-C for Well Mitigation.

### **ES 4.1. PMAs Planned for Implementation**

The GSA has identified PMAs that are planned to be completed prior to 2042. These projects and management actions are expected to support the GSA in achieving the GSP sustainability goal and responding to changing conditions in the Subbasin.

#### **ES 4.1.1. Multi-Benefit Groundwater Recharge Programs**

A multi-benefit recharge program will provide groundwater recharge through normal farming operations while also providing critical wetland habitat for shorebirds migrating along the Pacific Flyway. The Nature Conservancy (TNC) has prepared guidance to assist GSAs in planning on-farm multi-benefit groundwater recharge programs.

#### **ES 4.1.2. Grower Education and Outreach**

This program will provide growers with educational resources that help them to plan and implement on-farm practices that simultaneously support groundwater sustainability and maintain or improve agricultural productivity.

#### **ES 4.1.3. Deer Creek Instream Flow Enhancements and Conjunctive Use Management Projects**

Trout Unlimited has received funding from Proposition 1 through the Wildlife Conservation Board for the Deer Creek Instream Flow Planning and Design Project and the Deer Creek Irrigation District (DCID) Diversion Automation Project which proposes to increase in-stream flows at critical fish passage times by reducing Deer Creek diversions through increased conjunctive use of groundwater, improved on-farm water use efficiency, and modernization of water district infrastructure.

#### ES 4.1.4. Lower Deer Creek Improvements and Habitat Restoration Phases 1 and 3

This is a multi-benefit project developed by the Deer Creek Watershed Conservancy and the California Department of Fish and Wildlife that will setback the levees on Lower Deer Creek to increase floodplain habitat by approximately 40 acres while also providing off-channel recharge during high flow periods.

#### ES 4.1.5. Demand Management

The GSA passed a resolution to develop a Demand Management Program. The Program includes various measures to reduce demand on existing groundwater resources in the Subbasin. Some of the measures will be voluntary and will be implemented immediately, while others will be developed and implemented when groundwater conditions within the Subbasin warrant further management actions.

#### ES 4.1.6. Well Mitigation Program

The GSA has proceeded with coordination and focused planning efforts to develop a Well Mitigation Program, including the development of a resolution committing the GSA to take action. The Program will provide assistance to domestic, small water system, and municipal wells adversely impacted by declining groundwater levels since 2015 that interfere with groundwater production or quality. Assistance efforts would benefit domestic and municipal well users, including disadvantaged communities and underrepresented communities, experiencing adverse impacts as a result of overdraft conditions.

### ES 4.2. Proposed Potential PMAs

Projects and Management Actions in this category are proposed as potential options that GSAs may wish to implement, as needed, to support ongoing sustainability, to adapt to changing conditions in the Subbasin, and to achieve other water management objectives.

#### ES 4.2.1 Direct Groundwater Recharge

Potential projects would support efforts to recharge groundwater with excess surface water in wet years for use in dry years. Recharge may be done in conveyances such as unlined canal and laterals, natural drainages such as creek beds, recharge basins, agricultural fields, and aquifer storage and recovery (ASR) wells. Projects could also be directed at making improvements to stormwater management facilities to enhance groundwater recharge of stormwater, capture rainfall through modification of on-field conditions, and facilitate use of recycled water for groundwater recharge.

#### ES 4.2.2. Invasive Plant Removal

Groundwater demand reduction can be achieved by conveyance improvements such as removal of invasive plants from creeks and irrigation canals. Plant removal would reduce conveyance issues, reduce evapotranspiration (ET), and allow for more water in the shallow groundwater areas, restoring conditions for GDEs and native riparian species.

#### ES 4.2.3. Surface Water Supply Augmentation & In-Lieu Groundwater Recharge

Programs directed at promoting inter-basin surface water transfers or exchanges can potentially subsidize surface water costs so that it is less expensive than groundwater. Construction, renovation, or conversion of flood control facilities to water supply reservoirs can increase available supply of surface water.

#### ES 4.2.4. Education/Outreach, In-Lieu Groundwater Recharge

This management action assist growers with conversion to efficient and dual-source irrigation systems, improve surface water conveyance and irrigation infrastructure to allow growers to utilize both surface water and groundwater for drip irrigation of orchards, assist growers with capital improvements to irrigation infrastructure, from use of groundwater to use of surface water or dual-source systems.

#### ES 4.2.5. In-Lieu Groundwater Recharge

Management actions aimed at increasing In-Lieu recharge may incentivize use of surface water for irrigation when available to allow groundwater levels to recover in between drought years when surface water is not available. Effective management actions may also increase use of surface water by creating a water market for exchanging surface water and groundwater.

#### ES 4.2.6. Monitoring to Fill Data Gaps & Programs to Support Wells

Several data gaps have been identified in this GSP. Additional studies of GDEs and groundwater surface water interactions, expanded subbasin monitoring and aquifer testing, install additional agroclimate stations, maintain and expand groundwater level monitoring network, and a one-time groundwater quality snapshot are all actions that can be taken to improve data gaps.

To support well owners and reduce impacts of potential undesirable results a county-wide system to tracking dry domestic wells will better inform and lead to better management of assistance to domestic well owners when water levels drop, and wells go dry.

### ES 5. PLAN IMPLEMENTATION

This GSP will be implemented to achieve the Subbasin sustainability goal by 2042 and avoid undesirable results through 2070 as required by SGMA and GSP regulations. Implementation of this GSP includes PMAs in addition to on-going activities that will be completed by the GSA related to monitoring, management, administration, updates, reporting, and public outreach.

GSP implementation costs include both costs specific to projects and management actions and costs for the GSA to administer and operate all other tasks associated with the GSP over the 20-year implementation period. The total cost is estimated to be approximately \$19,757,000.

These costs may be subject to change, as they are projections based on the time of development of this report. GSP implementation and GSA support costs are estimated on an annual basis and are described in further detail below.



**Table ES-3. Estimated GSP Implementation Costs through 2042**

<b>FISCAL YEAR</b>	<b>GSA ADMINISTRATION</b>	<b>MONITORING</b>	<b>5-YEAR UPDATES</b>	<b>10% CONTINGENCY</b>	<b>TOTAL</b>
<b>2022</b>	\$470,000	\$104,000	\$0	\$57,000	\$631,000
<b>2023</b>	\$484,000	\$107,000	\$0	\$59,000	\$650,000
<b>2024</b>	\$499,000	\$110,000	\$0	\$61,000	\$670,000
<b>2025</b>	\$514,000	\$114,000	\$0	\$63,000	\$690,000
<b>2026</b>	\$529,000	\$117,000	\$150,000	\$80,000	\$876,000
<b>2027</b>	\$545,000	\$121,000	\$150,000	\$82,000	\$897,000
<b>2028</b>	\$561,000	\$124,000	\$0	\$69,000	\$754,000
<b>2029</b>	\$578,000	\$128,000	\$0	\$71,000	\$777,000
<b>2030</b>	\$595,000	\$132,000	\$0	\$73,000	\$800,000
<b>2031</b>	\$613,000	\$136,000	\$169,000	\$92,000	\$1,010,000
<b>2032</b>	\$632,000	\$140,000	\$174,000	\$95,000	\$1,040,000
<b>2033</b>	\$651,000	\$144,000	\$0	\$79,000	\$874,000
<b>2034</b>	\$670,000	\$148,000	\$0	\$82,000	\$900,000
<b>2035</b>	\$690,000	\$153,000	\$0	\$84,000	\$927,000
<b>2036</b>	\$711,000	\$157,000	\$196,000	\$106,000	\$1,170,000
<b>2037</b>	\$732,000	\$162,000	\$202,000	\$110,000	\$1,205,000
<b>2038</b>	\$754,000	\$167,000	\$0	\$92,000	\$1,013,000
<b>2039</b>	\$777,000	\$172,000	\$0	\$95,000	\$1,044,000
<b>2040</b>	\$800,000	\$177,000	\$0	\$98,000	\$1,075,000
<b>2041</b>	\$824,000	\$182,000	\$227,000	\$123,000	\$1,357,000
<b>2042</b>	\$849,000	\$188,000	\$234,000	\$127,000	\$1,397,000
<b>Total</b>	\$13,478,000	\$2,983,000	\$1,502,000	\$1,798,000	\$19,757,000

Development of this GSP was funded through Proposition 1 and Proposition 68 Grants. Ongoing implementation, monitoring, and reporting are expected to be funded through fees and outside grants and funding. The GSA is currently developing a financing plan that will include one or more of the following financing approaches

- Grants and low-interest loans: GSA will continue to pursue grants and low interest loans to help fund planning studies and other GSA activities. However, grants and low-interest loans are not expected to cover all of the GSA operating costs for GSP implementation
- GSP Implementation Costs: Initial implementation costs not covered by grant funding will be assessed through either land-based charge or groundwater usage charge. In the future the GSA may adopt a volumetric charge on groundwater extracted from the Subbasin.
- Taxes: This could include general property related taxes that are not directly related to the benefit or cost of a service (ad valorem and parcel tax), or special taxes imposed for a specific purpose related to GSA activities.

The GSA is pursuing a combined approach, targeting available grants and low interest loans, and considering a combination fee and assessment to cover operating and program-specific costs. The GSA will comply with statutory and California constitutional requirements to adopt any rate, fee, charge, or assessment to fund implementation of the GSP.

This GSP will be adopted and submitted to DWR by January 31, 2022. The implementation timeline will begin thereafter and will allow the GSA to develop and implement projects and management actions to meet sustainability objectives by 2042. GSP implementation also includes annual and periodic evaluations and submittals to DWR. The full schedule for implementation is subject to change and will be evaluated and updated as necessary based on implementation progress, sustainability goals, monitoring, and other factors that could affect implementation. The implementation timeline as presently described is outlined below in **Figure ES-3**.


The GSP uses best available information and the best available science to provide a road map for the Los Molinos Subbasin to meet its sustainability goal by 2042 and comply with SGMA regulations. During each five-year update, progress will be assessed, and the GSP revised as necessary, to achieve the sustainability goal by 2042 and comply with SGMA regulations.

Annual reports will be completed and submitted to DWR by April 1 of each year pursuant to GSP Regulation §356.2. Annual reports will include sections on general information, basin conditions, and plan implementation progress for the reporting period. The annual report submitted to DWR will comply with the requirements of §356.2. The GSA will evaluate the GSP every five years and whenever the plan is amended. The evaluation will be submitted to DWR and include the elements of the Annual Report, a summary of the GSP, project, and management action implementation progress, and progress toward meeting the sustainability goal of the Subbasin.

The Revised GSP will be adopted and submitted to DWR by April 23, 2024. The updated implementation timeline will begin thereafter, to include updated projects and management actions. Specifically, the Demand Management and Well Mitigation Programs will be developed and implemented no later than January 1, 2026.

**Figure ES-3. GSP Implementation Schedule**

TASK NAME	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042
<b>Plan Implementation</b>																					
GSP Submittal to DWR	x																				
Revised GSP Submittal to DWR			x																		
Outreach and Communication																					
Monitoring and DMS																					
<b>GSP Reporting</b>																					
Annual Reports	x	x	x	x	x		x	x	x	x		x	x	x	x		x	x	x	x	
5-year GSP Evaluation Reports						x					x					x					x

x Indicates a submittal.  
 Indicates ongoing event.

**ES 6. OVERVIEW OF GOVERNANCE**

In adopting the Sustainable Groundwater Management Act (“SGMA”), the Legislature made clear that nothing in SGMA “determined or alters surface water of groundwater rights under common law or any provision of the law that determines or grants surface water rights. In other words, the Legislature intended that actions undertaken in accordance with SGMA to respect common law water rights.

This GSP established the objectives of maximizing the beneficial use of water with the Los Molinos Subbasin, without causing undesirable results. The powers of the GSA are set forth in SGMA. This GSP meets the requirements of SGMA and vests the management authority in the GSA. Authorities include Powers of the Board, Rules and Regulations, Committees, Specific Powers, Variances and Complaints.